

GL 60 LED

LED PROJECTOR



SPECIFICATIONS

item:.....GL 60 LED
body:aluminium
available colours: silver-grey
weight:2.95 kg
on / off switch:.....on the backside of the device
environmental conditions:..... for indoor use only
cooling:..... active ventilation
light source:60 W Extreme-Power LED
recommended projections distance in normal room light: 8 m
recommended projection distance in darkness: 20 m
average lifetime of the LED: 30,000 operating hours
colour temperature:6,500 - 8,000° Kelvin
luminous flux of the LED: 2,900 Lumen
gobo size / image size since March 2013: 50 mm ø / 32 mm ø
gobo size / image size until February 2013:..... 70 mm ø / 32 mm ø
voltage:90-120 V or 220-240 V AC / 50-60 Hz
active power (power consumption):..... 90 W
apparent power: 150 VA
efficiency:.....0.6 cos. ϕ
electrical protection:..... protection class I
changeable lens:..... yes, several focal lengths are available
lighting effects:.....yes, several lighting effects are available
connectors for lighting effects:..... 2 x 12 V AC
item number:.....20000230 (silver-grey)


COMPONENTS

Standard series with extreme power LED, 85 mm standard lens, power cable with plug. The machine is ready to plug in and run. Required accessories: glass gobo with individually designed motif.


We reserve the right to make technical and optical modifications. Our general terms and conditions apply.

PROJECTION DIAMETER WITH INCREASING DISTANCE

(with Standard Lens, $f=85\text{ mm}$)

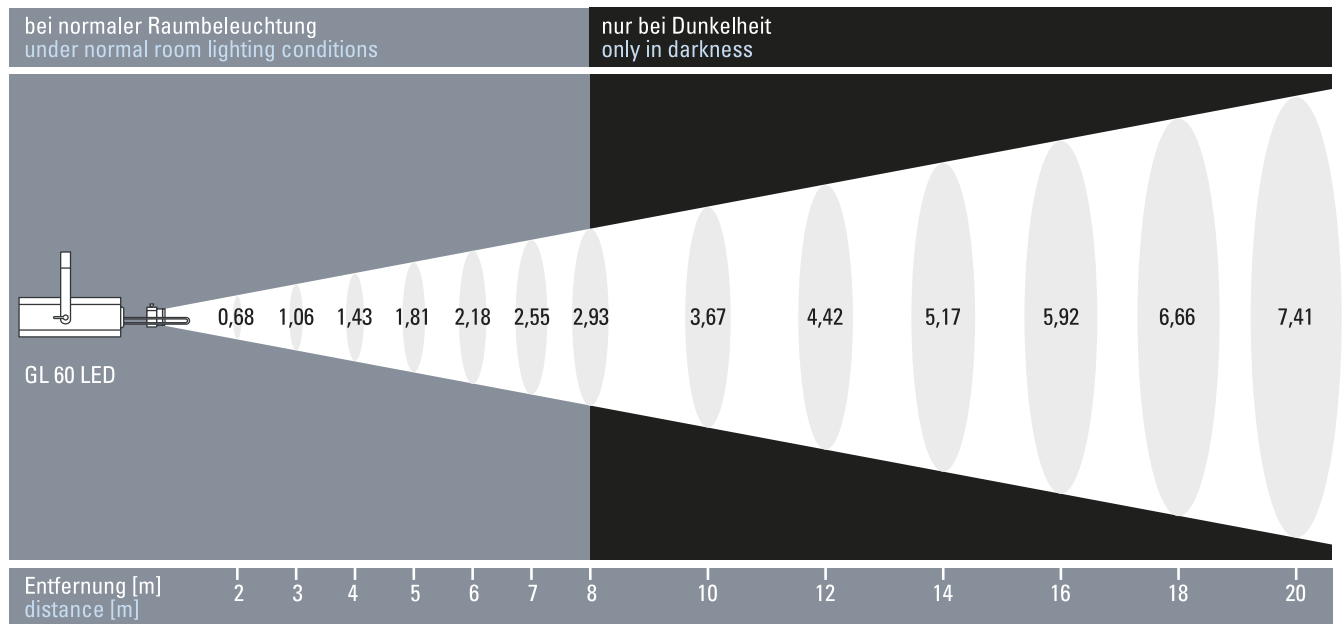

MEASUREMENTS

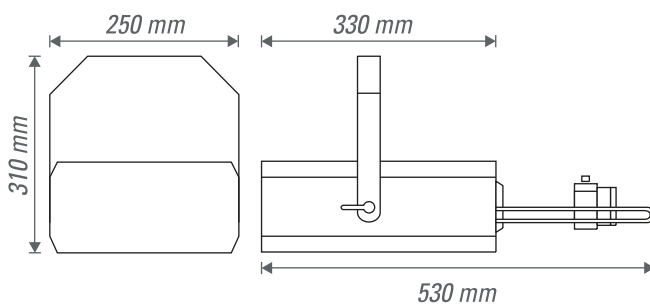

derksen®
lichttechnik

Derksen Lichttechnik GmbH
Sauerlandstraße 5
45889 Gelsenkirchen
Germany

Phone: +49 (0) 209 / 980 70-0
Fax: +49 (0) 209 / 980 70-60

info@derksen.de
www.derksen.de