

PHOS 20 downlight LED PROJECTOR




SPECIFICATIONS

item:..... PHOS 20 downlight
body: aluminium
available colours: silver, white
weight: 3.4 kg
on / off switch:..... not available
environmental conditions:..... for dry indoor environments only
pivot range:..... ca. 15°, 2 axis
cooling:..... active ventilation
light source: 20 W high power LED
recommended projection distance in normal room light: 3.0 m
recommended projection distance in darkness: 6 m
average lifetime of the LED: 65,000 operating hours
colour temperature: 6,500 - 8,000 °Kelvin
luminous flux of the LED: 1,700 Lumen
gobo size / image size: 50 mm ø / 35 mm ø
input voltage: 90 - 264 V AC / 47 - 63 Hz
active power (power consumption):..... 26 W
apparent power: 55 VA
efficiency:..... 0.48 cos. ϕ
electrical protection:..... protection class I
order number:
white:..... 20001610
silver:..... 20001630


COMPONENTS

Standard series with high power LED and 85 mm standard lens. The machine is ready to plug in and run.
Required accessories: glass gobo with individually designed motif.

PROJECTION DIAMETER WITH INCREASING DISTANCE

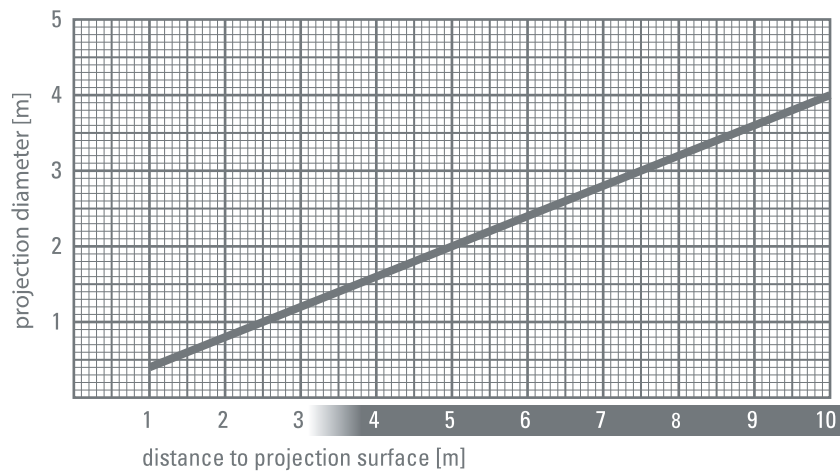

MEASUREMENTS

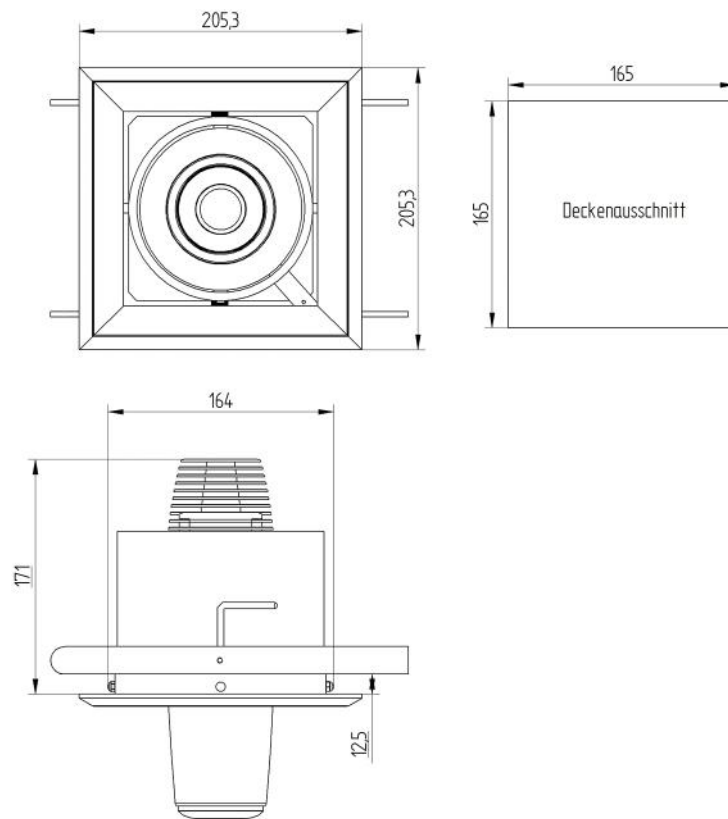

derksen®
lichttechnik



Derksen Lichttechnik GmbH
Sauerlandstraße 5
45889 Gelsenkirchen
Germany

Telefon: +49 (0) 209 / 980 70-0
Telefax: +49 (0) 209 / 980 70-60

info@derksen.de
www.derksen.de