

PHOS mini LT LED PROJECTOR



SPECIFICATIONS


item:	PHOS mini LT
body:	aluminium
available colours:	silver / black / white
weight:	1.75 kg
on / off switch:	not available
environmental conditions:	for indoor use only
pivot range:	approx. 320° vertical
cooling:	passive, noiseless
light source:	10 W High-Power LED
recommended projection distance in normal room light:	3 m
recommended projection distance in darkness:	6 m
average lifetime of the LED:	65,000 operating hours
colour temperature:	6,500 - 8,000° Kelvin
luminous flux of the LED:	860 Lumen
gobo size / image size:	37.5 mm ø / 20.0 mm ø
voltage:	90 - 264 V AC / 47 - 63 Hz
active power (power consumption):	14 W
apparent power:	36 VA
efficiency:	0.39 cos. ϕ
electrical protection:	protection class I
item number:	
silver:	20001230
black:	20001220
white:	20001210

COMPONENTS


Standard series with high power LED, 85 mm standard lens, adapter for mounting the projector on a 3-phase lighting track. The machine is ready to plug in and run. Required accessories: glass gobo with individually designed motif.

We reserve the right to make technical and optical modifications. Our general terms and conditions apply.

PROJECTION DIAMETER WITH INCREASING DISTANCE

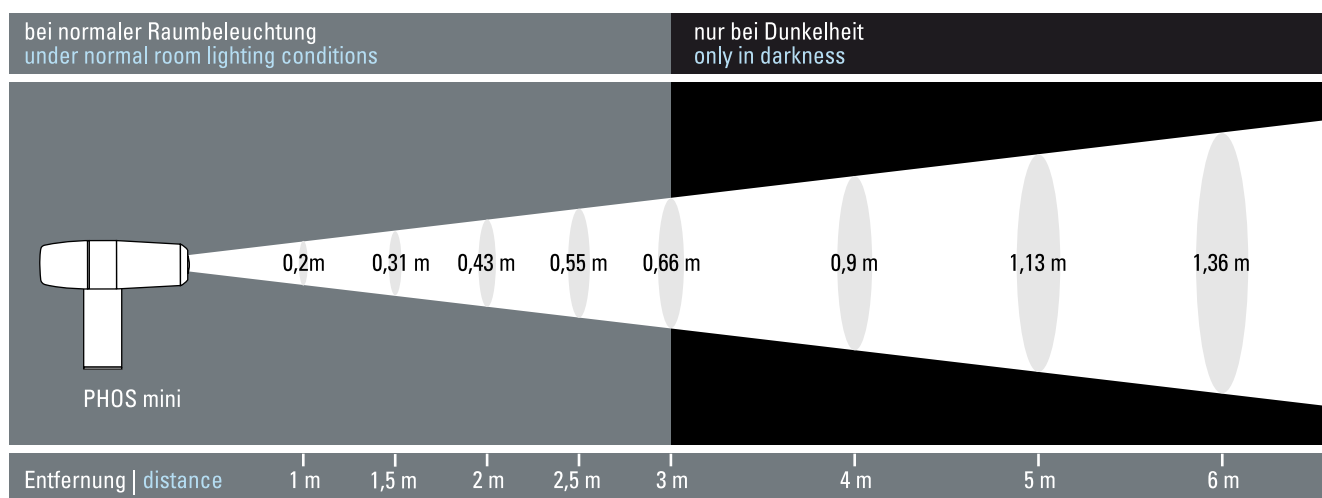

MEASUREMENTS

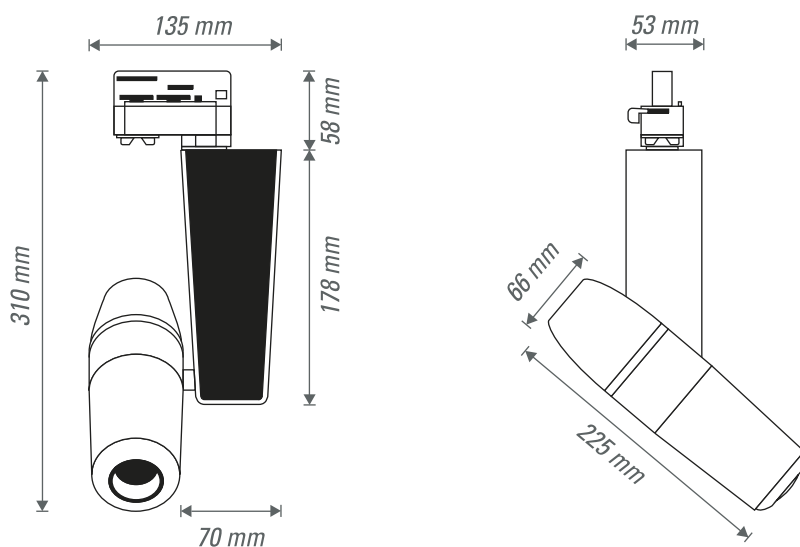

derksen®
lichttechnik

Derksen Lichttechnik GmbH
Sauerlandstraße 5
45889 Gelsenkirchen
Germany

Phone: +49 (0) 209 / 980 70-0
Fax: +49 (0) 209 / 980 70-60

info@derksen.de
www.derksen.de